


Category 6A

U/UTP 23 AWG LSZH

Cable Construction

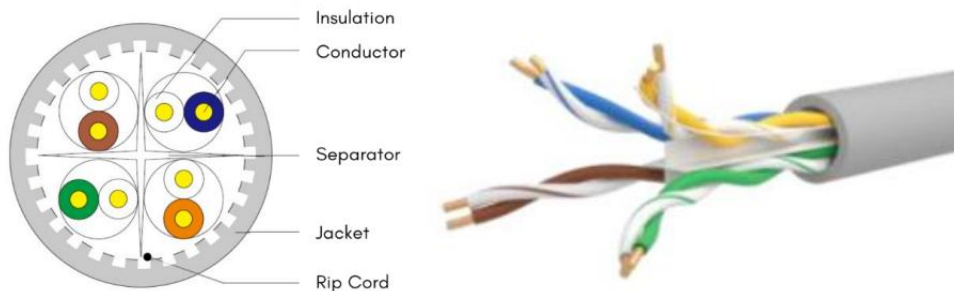

Genius Category 6A U/UTP 10 Gigabit Ethernet cable is engineered with four balanced twisted copper pairs to ensure reliable signal integrity. It is designed to deliver Category 6A permanent link and channel performance up to 500 MHz, in alignment with internationally defined standards. This ensures integrated networking, high speed, superior data throughput, and high efficiency, making it ideal for modern LAN infrastructure. The cable supports data, voice, and video networks

Key Features

- Designed for 10/100/1000BASE-T and 10GBASE-T, support up to 10 Gbps
- Cat 6A U/UTP cable compliant with TIA, ISO/IEC & EN standards
- Digital and analogue voice and video (RGB) signals on LANs
- Operates at bandwidth of 500MHz, Tested Up to 800MHz.
- Compatible with PoE, PoE+ and PoE++ (IEEE 802.3af/at/bt) applications
- RoHS Compliant & UL Listed
- ETL Verified & Part of ETL 4 Connector Channel
- Genius Network Brand Performance Warranty for 25 years



Product Construction

Conductor Size	23 AWG
Conductor Material	Annealed Bare Copper
Conductor Count	8 Nos
No of Pairs	4 Pairs
Insulation Diameter	1.10 mm (Nominal)
Insulation Material	HDPE
Pair Color	Blue-White with Blue Orange-White with Orange Green-White with Green Brown-White with Brown
Central Separator	X - Shaped
Central Separator Material	HDPE
Rip Cord	Yes
Outer Jacket Material	LSZH
Jacket Thickness	0.55 mm (Nominal)
Outer Jacket Color	Grey & Blue
Cable Diameter	7.1 ± 0.4 mm
Nominal Weight	50 ± 5 kg/Km
Min Bending Radius	4D (D - Cable Diameter)
Minimum Elongation at Break	≥300% (Typical)
Pulling Force	11.5 Kg

Environmental Specification

Installation Temperature	-40 °C to +75 °C
Operating Temperature	-20 °C to +75 °C
Storage Temperature	-20 °C to +75 °C

Electrical Characteristics @20°C ±1°C

Operating Frequency	500 MHz
Tested Frequency	Up to 800 MHz
Characteristic Impedance	100 Ω ±15 Ω @ 1-250 MHz 100 Ω ±25 Ω @ 251-500 MHz
Conductor resistance (DC)	≤ 9.38 Ω / 100 m
Resistance unbalance	5% Max
Mutual Capacitance	≤ 5.6 nF / 100 m
Capacitance unbalance	330 pF/100 m
Cable Skew	≤ 45 ns / 100 m
NVP	69%
Max propagation delay	535 ns/100 m @ 250 MHz
Max operating Voltage	300 V
Insulation Resistance	500 MΩ Minimum
Dielectric Strength	1.2 kv DC for 1 sec

Transmission Characteristics Per 90 Mtrs

Frequency MHz	IL max dB	NEXT min dB	ACR-N min dB	PSNEXT min dB	PS ACR-N min dB	ACRF min dB	PSACRF min dB	RL min dB
1	0.7	88.5	87.8	84.5	83.8	87	83	29
4	2	76.5	74.5	72.5	70.5	74	70	25
8	3.2	68.5	65.3	64.5	61.3	65	61	23
10	3.7	66.5	62.8	62.5	58.8	62	58	22
20	5.2	58.5	53.3	54.5	49.3	53	49	21
31.25	6.7	52.5	45.8	48.5	41.8	46	42	19
50	9.1	46.5	37.4	42.5	33.4	37	33	17
62.5	10.4	44.5	34.1	40.5	30.1	34	30	16
100	14	42.8	28.8	38.5	24.5	28.5	25	15
200	23	38.5	15.5	34.5	11.5	15.2	11.8	14
250	25.8	36.5	10.7	32.5	6.7	10.4	7.1	14
300	28.3	35	6.7	31.1	2.8	6.4	3.2	13.5
500	45.2	32.3	-12.9	30.3	-14.9	11.8	8.8	14.2

Standards, Certifications & Compliances

- Compliance with Transmission Standards ANSI/TIA-568-C.2, ANSI/TIA-568.2-D, ANSI/TIA-568.2-E, ISO/IEC 11801, EN 50173
- Supports PoE++ in accordance with IEEE 802.3af / 802.3at / 802.3bt
- ETL Verified & Part of ETL 4 connector Channel
- UL Listed
- UL fire-performance classification - CM, B2ca
- RoHS v3 Compliant
- Compliance with IEC 60332-1-2, IEC 60332-3 for Flammability Test
- Compliance with IEC 60754-1/2 for acid gas emission
- Compliance with IEC 61034-2 and ASTM D2843 for smoke density
- Compliance with ASTM D2863 for minimum oxygen index

Packaging

Packaging

Wooden Bobbin, 305
Meters

Ordering Information

Part Number	Product Description
GCTCAUT3BLZ3X	Genius Cat 6A U/UTP LAN cable LSZH 305 Meters Blue
GCTCAUT3GLZ3X	Genius Cat 6A U/UTP LAN cable LSZH 305 Meters Gray

